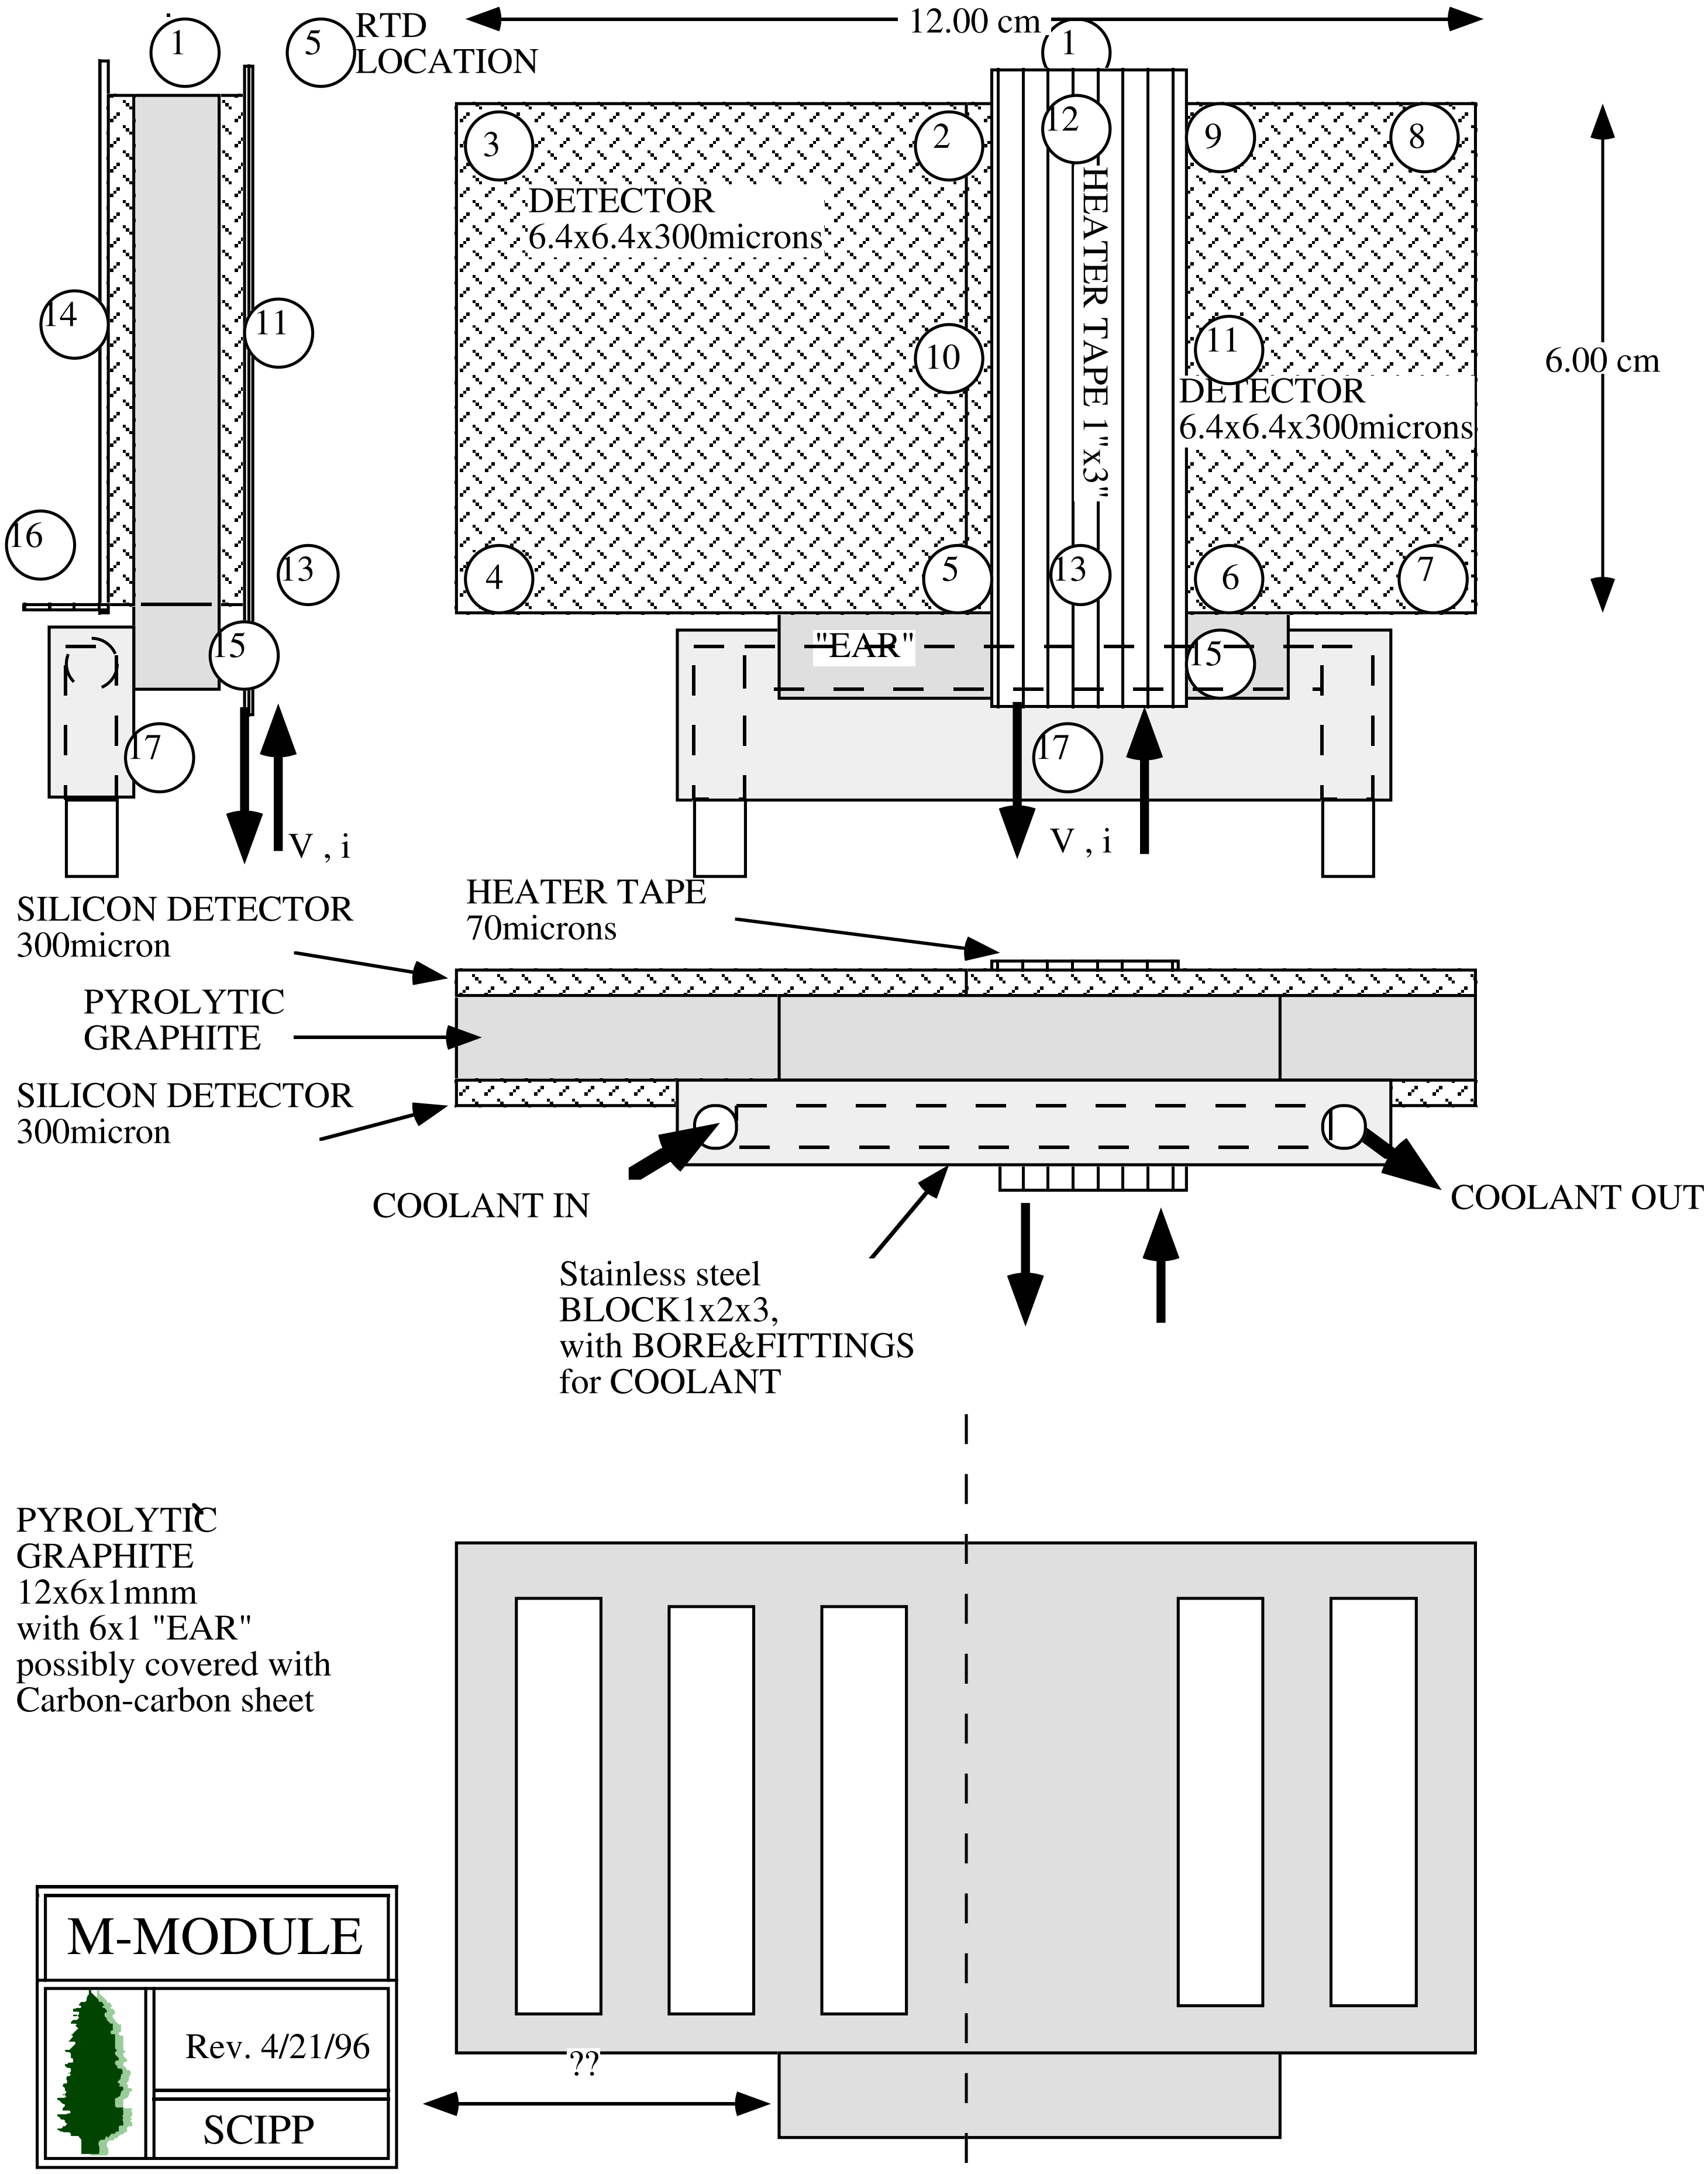

RTD LOCATION
12.00 cm
6.00 cm
DETECTOR 6.4x6.4x300microns
DETECTOR 6.4x6.4x300microns
HEATER TAPE 1"x3"
"EAR"
V , i
V , i
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
SILICON DETECTOR 300micron
HEATER TAPE 70microns
PYROLYTIC GRAPHITE
SILICON DETECTOR 300micron
COOLANT IN
COOLANT OUT
Stainless steel BLOCK1x2x3, with BORE&FITTINGS for COOLANT
PYROLYTIC GRAPHITE 12x6x1mnm with 6x1 "EAR" possibly covered with Carbon-carbon sheet
??
M-MODULE
Rev. 4/21/96
SCIPP